


Digital Compression Type Load Cell

CRZ-31D

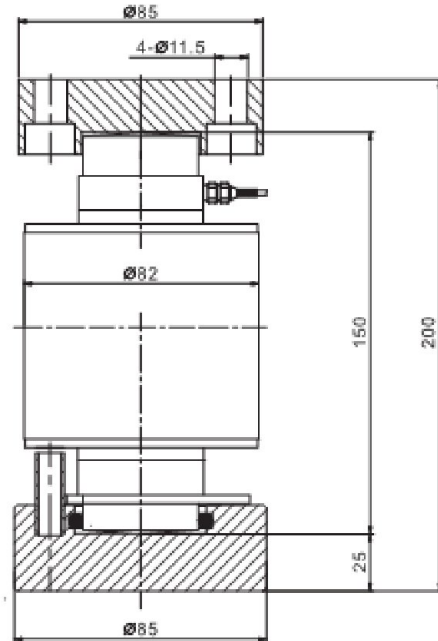

Full Scale Output Code		
Model		CRZ-31D
Capacity	t	10,20,25,30,40,50
Junction port ESD Protection	KV	20
A/D Conversion Speed	times/second	80
Communication Baud Rat	BPS	9600
Accuracy class		C3
Creep	%RO	±0.016
Temperature Coefficient	% RO /10°C	±0.02
Operating Temperature Range	°C	-30 ~ +70
Zero Output	%RO	±0.01
Safe overload	%RO	150
Protection Level		IP68
Recommended Input Voltage	DC V	5-15
Maximum Transmission Distance	Meter	1200
Connection Method		RS 485