


Single Point Type Aluminum Load cell

CRZ-5

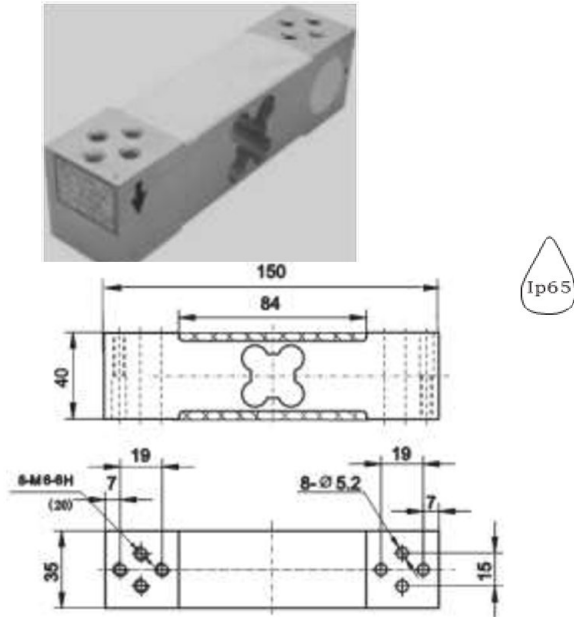

Application		Scale
Model		CRZ-5
Capacity	kg	60,100,200,300
Rated output	MV/V	2.0±0.15
Accuracy class		C3
Maximum number of verification intervals	n_{max}	3000
Minimum load cell verification intervals	V_{min}	$E_{Max}/7500$
Combined erro	%RO	≤±0.02
Creep	%RO/30min	0.02
Temperature effect on sensitivity	%RO/°C	0.0016
Temperature effect on zero	%RO/°C	0.002
Zero balance	%RO	±1.0
Input resistance	Ω	402±6
Output resistance	Ω	350±3
Insulation resistance	M Ω(50V)	5000
Recommended excitation voltage	V	10~15
Compensated excitation voltage	°C	-10~+40
Operating temperature range	°C	-35~+80
Safe overload	%RO	150
Ultimate overload	%RO	200
Load cell material		Aluminum
Connecting cable		Ø5.7X2m